



MAXI

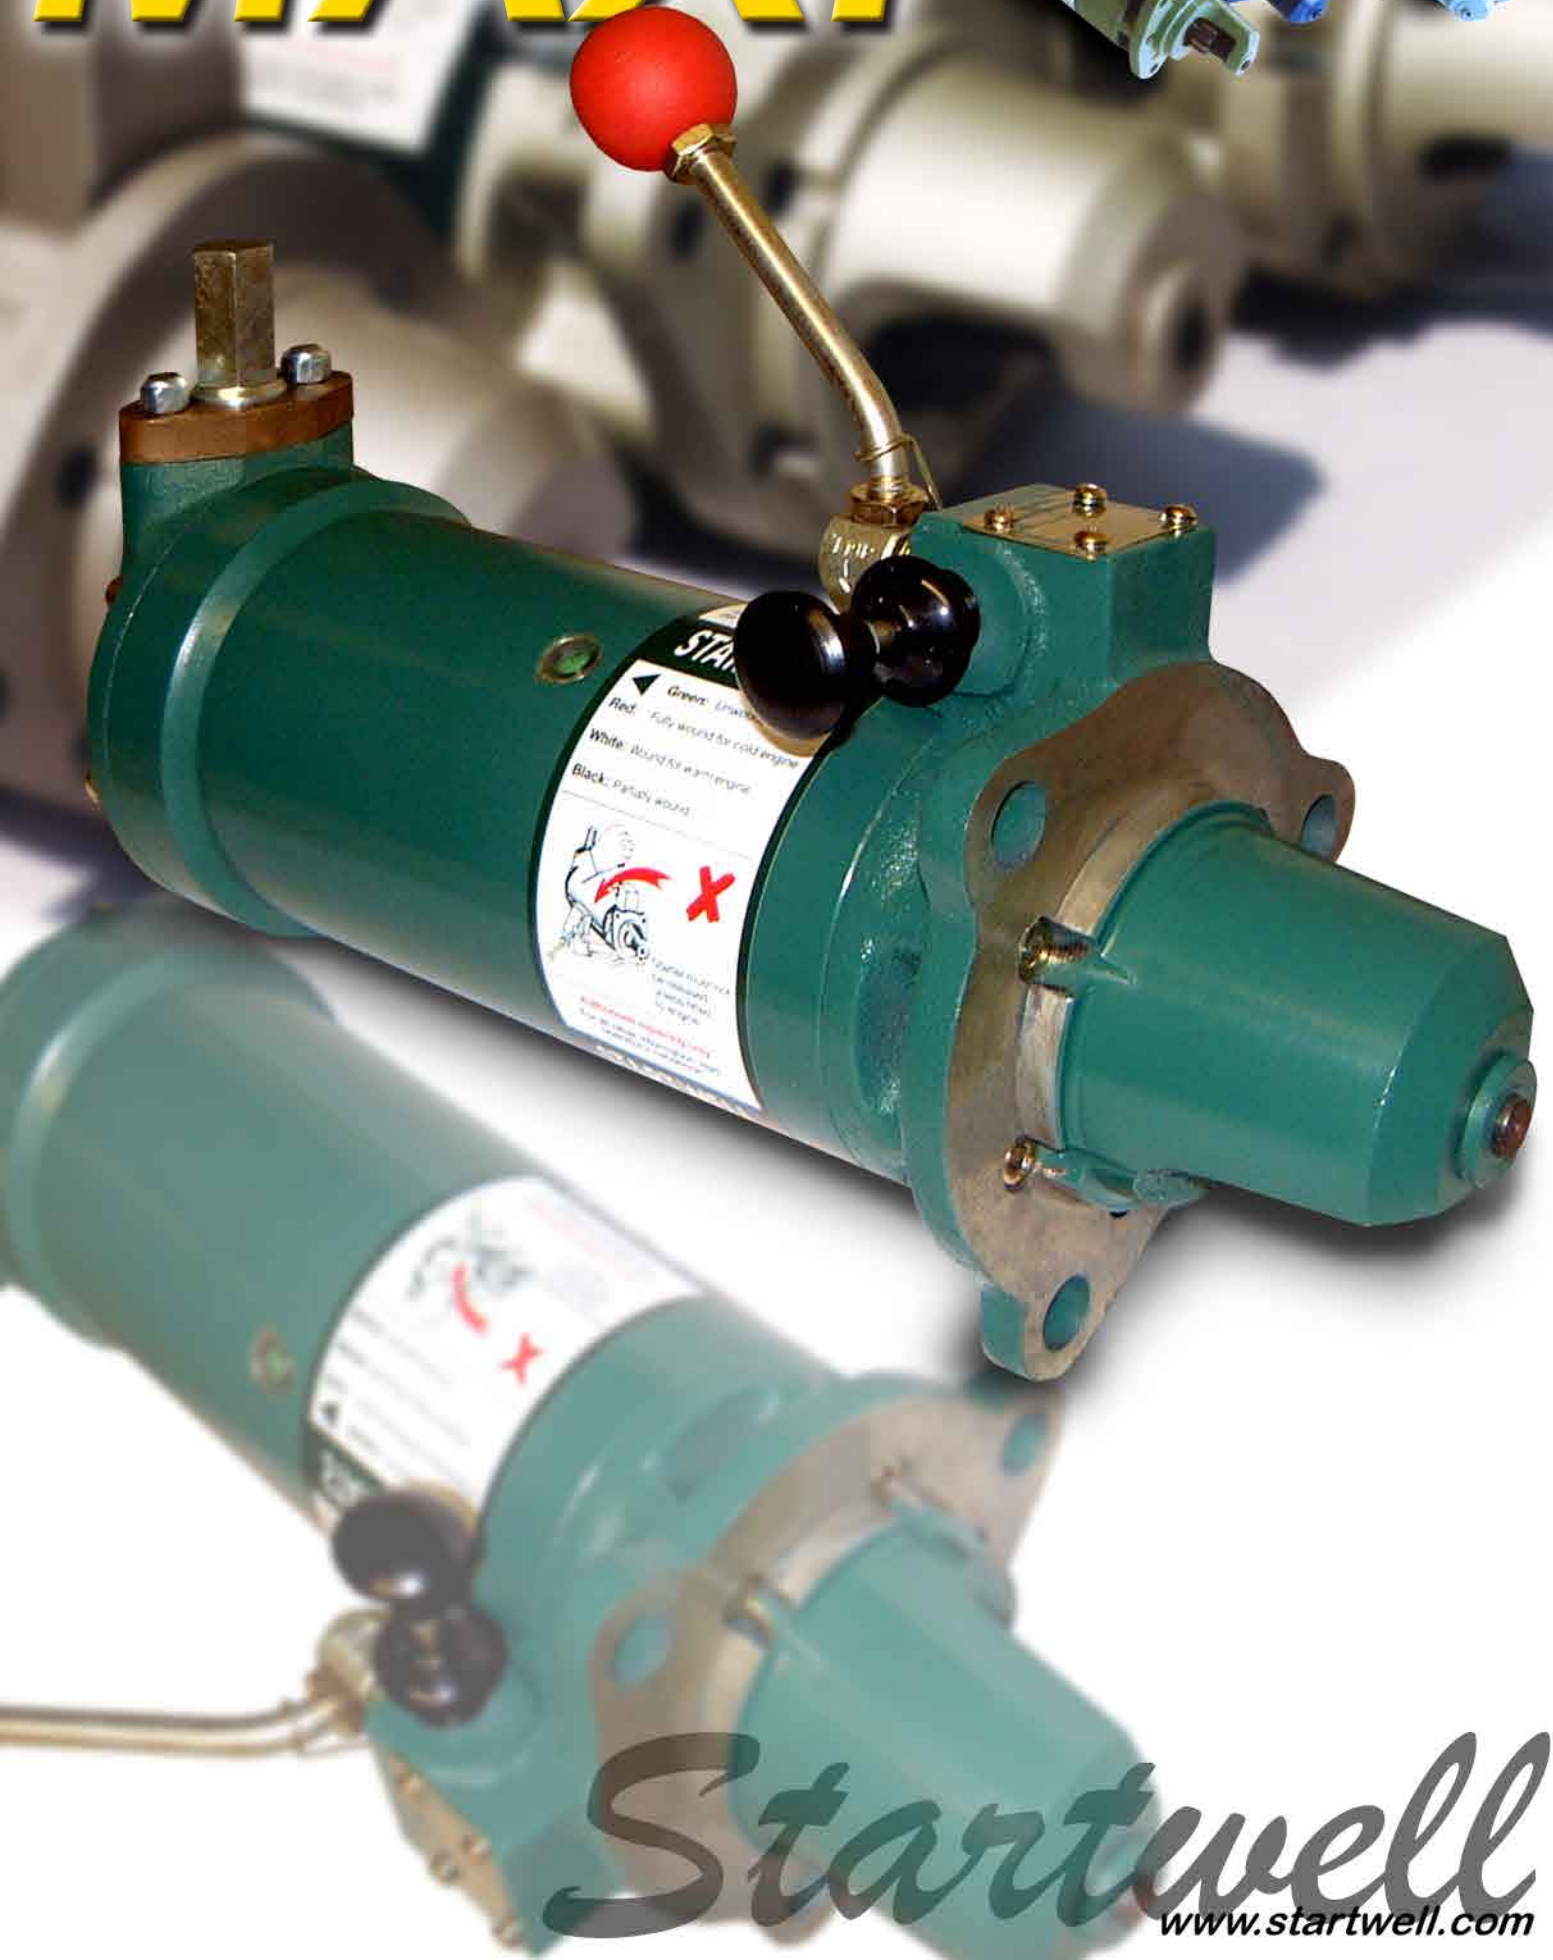

Startwell
www.startwell.com

Applications include:

Caterpillar
Cummins
Detroit
Man
Perkins
Scania
Volvo

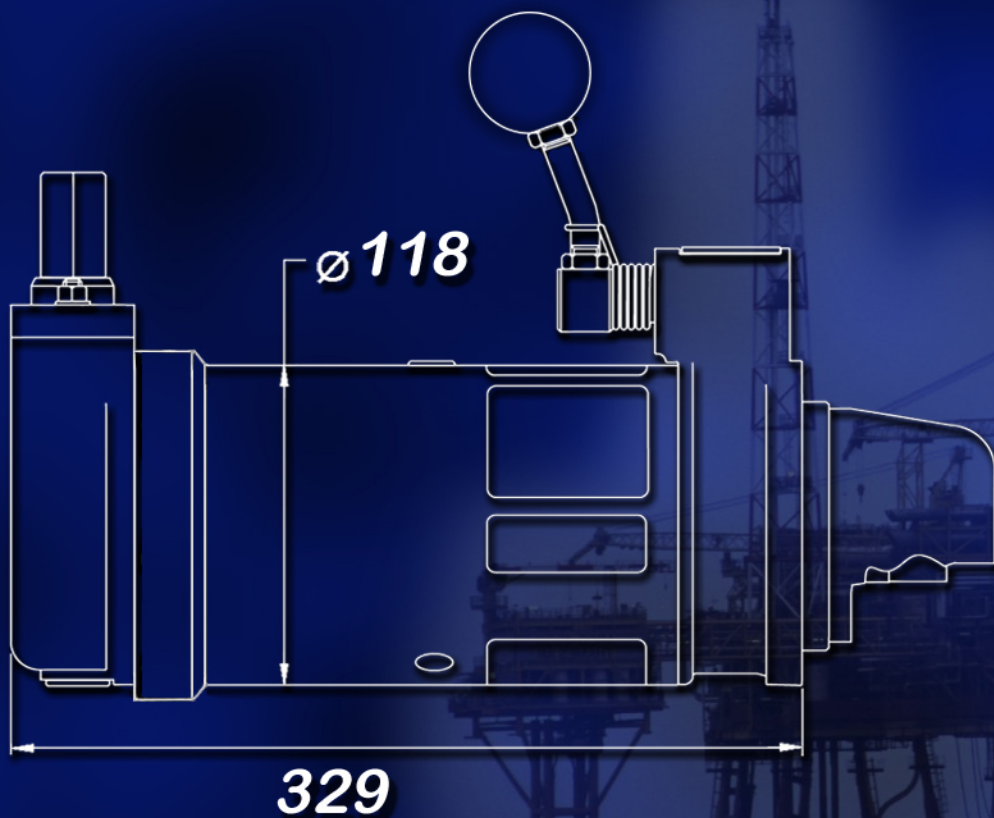

Startwell Engineering (UK) Ltd.



5 The Crystal Centre,
Crystal Way,
Elmgrove Road,
Harrow,
HA1 2HP, UK

tel +44 (0) 20 8863 4450
fax +44 (0) 20 8863 4410

For further information see our website:

www.startwell.com

Maxi Specification

Rotation:	Model SXC Clockwise Model SXA Anti-clockwise
Mounting:	Flange mounted SAE 1; SAE 2; SAE 3
Engine capacity:	1.5 litre/cyl, six cylinders maximum 1.25 litre/cyl, eight cylinders maximum
Pinion Type:	11 to 13 teeth 8/10 F/stub 11 to 12 teeth 6/8 F/stub 11 to 13 teeth Mod 3
Pinion to flange face:	47mm
Maximum torque at pinion:	126Nm (93 Ft.lb)
Maximum winding handle torque:	81 Nm (60Ft.lb)
Winding handle position:	Variable in 8.5° increments
No. of turns to fully wind:	Two turns to engage, further 13 turns to fully charge
Weight:	21.5Kg
Cold Start:	Starting aid below 5°
Finish:	Marine finish as standard. Zinc plated body and housing. Powder coated paint all over to withstand marine environment. Electroless nickel plated shaft and pinion.

